


# PST AquaTight® Terminators

*The security solution*



Poor electrical terminations caused by moisture migration create havoc on system performance. Common faulty 75 Ohm terminations caused by moisture result in service calls. AquaTight® PST terminators guarantee the use of the proper port seal every time, keeping the moisture out, improving network performance and reducing costly service calls.

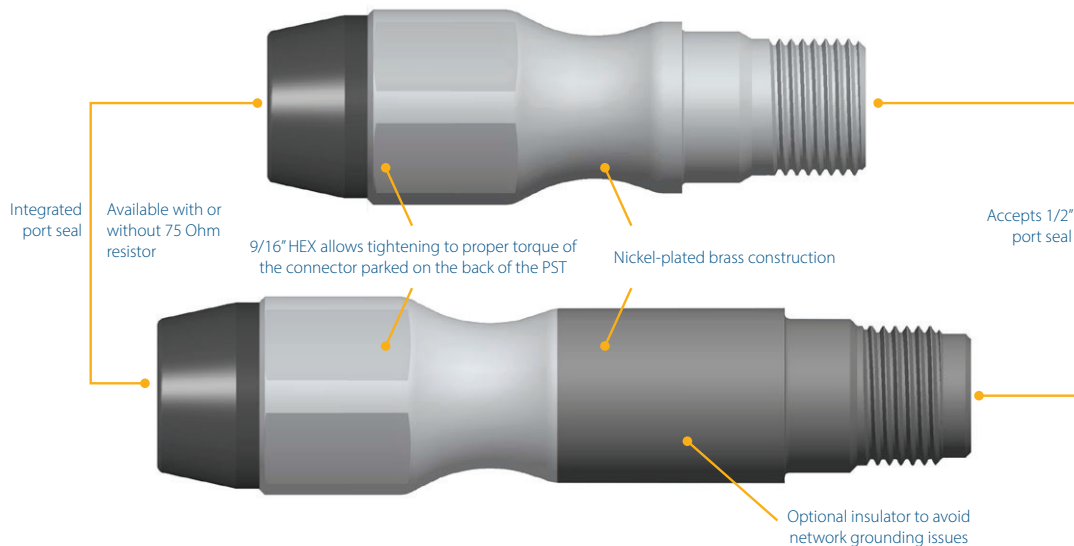

Specifications	
Return Loss	-30 dB to 3 GHz minimum
Shielding Effectiveness	-120 dB minimum
Corrosion Resistance	meets SCTE and Belcore per ATSM B117 (1000 hour salt fog)
Moisture Migration	Meets SCTE IPS-TP-013 (Red-dye moisture migration test)
<i>Meets or Exceeds all SCTE Specifications</i>	

Specifications for insulated versions only	
Resistance (electrical)	3.5E+13 Ohm
Isolation Withstand	>5,000 (VDC or VAC)
<i>Meets or Exceeds all SCTE Specifications</i>	



Part Numbers	
PSTNRWS	PST locking terminator, Integrated port seal, without 75 Ohm resistor
PST75WS	PST locking terminator, Integrated port seal, 75 Ohm resistor
PSTNRWS	PST locking terminator, Integrated port seal, insulator, without 75 Ohm resistor
PST75WS	PST locking terminator, Integrated port seal, insulator, 75 Ohm resistor


Preparation & Installation Tools				
Locking Terminator Tools	LTT4	LTT7	LTTV2/3	LTT7TP

# PST & Basic Terminators

## The security solution



High reliability in a small package. The PST Drop Terminator incorporates a variety of enhancements allowing users to terminate, secure and disconnect a drop, while offering longevity sealing for both the tap port and the drop connector.

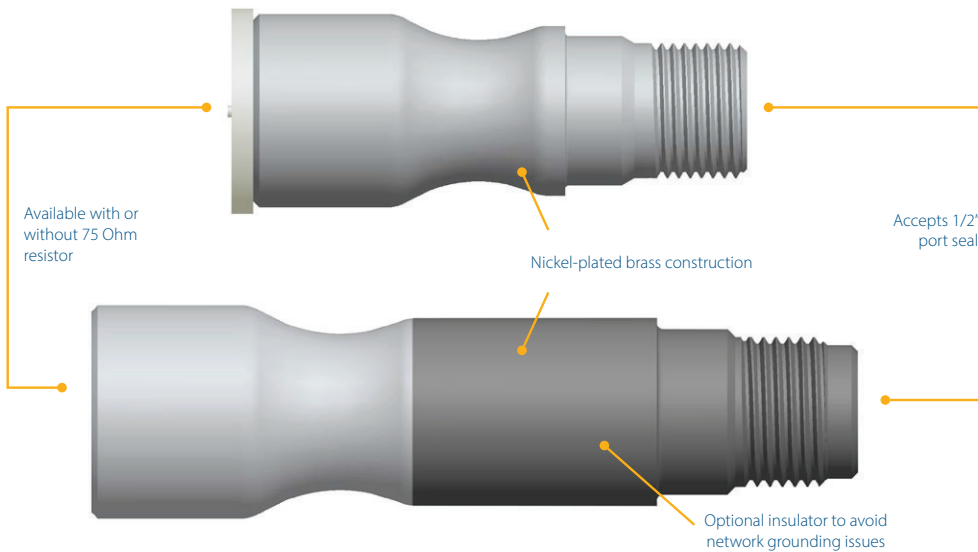

Specifications	
Return Loss	-30 dB to 3 GHz minimum
Shielding Effectiveness	-120 dB minimum
Corrosion Resistance	meets SCTE and Belcore per ATSM B117 (1000 hour salt fog)
Moisture Migration	Meets SCTE IPS-TP-013 (Red-dye moisture migration test)
<i>Meets or Exceeds all SCTE Specifications</i>	

Specifications for insulated versions only	
Resistance (electrical)	3.5E+13 Ohm
Isolation Withstand	>5,000 (VDC or VAC)
<i>Meets or Exceeds all SCTE Specifications</i>	



Part Numbers	
PSTNR	PST locking terminator, without 75 Ohm resistor
PST75	PST locking terminator, 75 Ohm resistor
PSTNRI	PST locking terminator, without 75 Ohm resistor
PST75I	PST locking terminator, 75 Ohm resistor
TR75S	Terminator, 75 Ohm resistor
TR75SS	Swivel type, theft proof, 75 Ohm resistor, used with security sleeve
TR75SSNR	Swivel type, theft proof, without 75 ohm resistor, used with security sleeve

### Basic terminators with and without 75 Ohm resistor



Preparation & Installation Tools				
Locking Terminator Tools	LTT4	LTT7	LTTV2/3	LTT7TP